

fibo Collect A business opportunity in self-service batching technology

Sustainable concrete solutions

A welcome message from the CEO

Hello and welcome to fibo intercon. My name is Henrik Jeppesen, and I am delighted that you have taken the time to learn about the fibo Collect business opportunity.

We are proud to develop high-quality mobile batching plants that are renowned in the industry for being customised and extremely durable. Many of our machines have proven to last for over 20 years.

Our focus has been on investing into the future of sustainable concrete and batching technology we always try to make the solution green and supportive of a circular economy.

Our philosophy towards product development is simple: innovation, digitalisation and sustainability.

Sincerely,

Henrik B. Jeppesen, CEO fibo intercon

Henrik B. Teppesen



"

What started as an internal sentence, "easy-to-clean-green-machine", has become our overall philosophy in product development.

fibo Collect has the power to help end-users save both money and time whilst generating a great return on investment for our customers.


Henrik B. Jeppesen

"

What's inside

See fibo in action Overviews of the product range Model specifications Optional extras Digital innovation Green thinking Customer stories Business support Service and support

CONTACT US

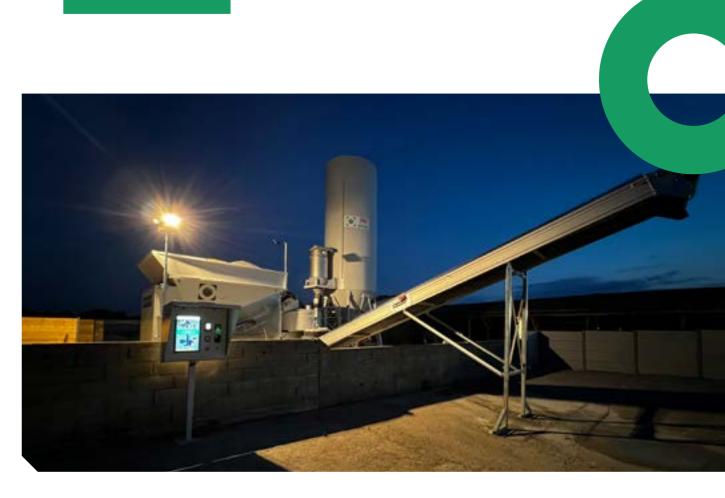

Enable your community with concrete, mortar and screed 24/7

- ✓ Give contractors and individuals in your community the opportunity to buy competitively priced, quality concrete, mortar and screed
- ✓ Supply your customers without creating waste and spill
- ✓ Attract more customers with a new unique selling point
- ✓ Offer customers a more convenient solution
- Reduce overall waste in the production process \checkmark
- ✓ Diversify your product offering
- ✓ Help customers get results by offering the same high quality product every time












Define your needs

These are our standard solutions enhance them to watch your needs.

FS range

F range

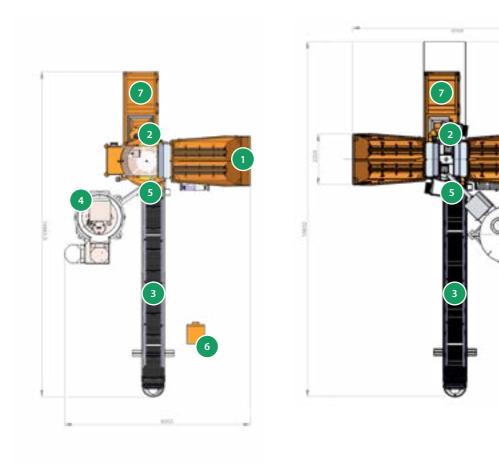




Configure your requirements

Increase the aggregate capacity of your solution to reduce labour cost.

FP Inliner range

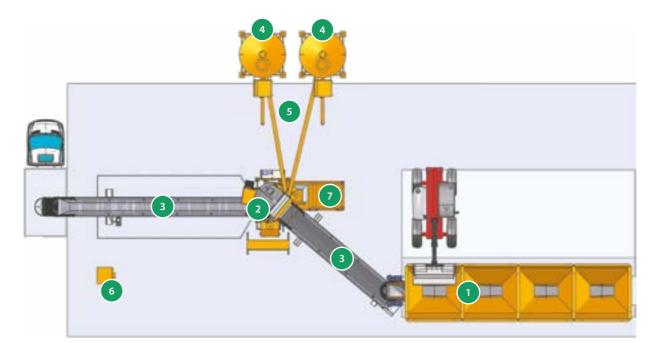






Create a one-stop shop

Up to 10 large aggregate hoppers. Expand your supply offering by selling concrete, mortar, screed and aggregates.

Extended range

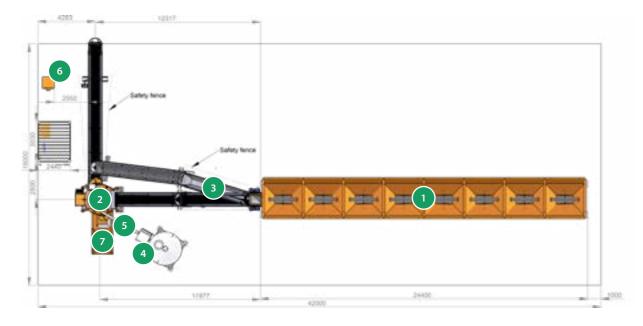



10

Features

In addition to a basic solution, there are numerous options and extra features to adapt to your work environment and customer requests.



Payment terminal. RFID token. payment terminal: a. Place an order on screen.

Payment

Cleaning

a. Place an order on the screen. b. Pay by credit card.



b. Scan your barcode at the terminal. c. Start batching your requested order.



Self cleaning mixer. Maintain your machine. An automated washing system cleans the pan mixer immediately after a batch is delivered or at a time of your choice. Everyone deserves a clean mix - both you and your customers.

Waste

Waste recycling unit. Reduce water cost and earn green money. Our recycling unit separates the washout from the water and reconditions the water for use in another concrete batch. **fibo** enables a cost-efficient and environmental production.







Issue RFID tokens to customers so they can collect from the fibo

b. Scan your RFID token.

c. Start batching your requested order.

Payment terminal. Pay on the go (credit card).

Pay and retrieve your concrete at the "**fibo** payment terminal":

c. Start batching your requested order.

Point of sale (POS). In-store bar code creation.

Pay at the counter and receive a barcode for self-service concrete collection.

a. Pay for your order in-store and receive a barcode.

Expand your supply offering by selling concrete, mortar, screed and aggregates.

1.1

CHI IVER PA



FS model specifications

The FS model is an ideal model where space is scarce and where the breadth of quality mixes required is limited – 1 hopper for sand and 1 hopper for gravel.



	FS 1200	FS 1800
Volume (Gross / Net) 🛛	1,200 / 800	1,800 / 1,100
Capacity m ³ per hour	10 - 16	20 - 30
Motor kW	18.5	30
Sound pressure level dB (A)	77.7	77.7
Mixing arms: side scrapers No	6:1	6:1
Load cells Kg	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3
Recipes No	60	60
Aggregate hopper m ³	2 x 2.4	2 x 2.4
Water tank ∟	500	500
Dimension (W x H x L) m	2.3 x 2.5 x 5.3	2.3 x 2.5 x 5.9
Weight Kg	4,000	6,500
Power Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
A/KVA	50 / 35	80 / 55
Socket inlet	CEE 63A 5P 230/400V	CEE 63A 5P 230/400V
Generator KVA	65	100

F model specifications

The F model features 4 hoppers and allows for a wide variety of high-quality concretes and mortars to be produced.



	F 1200	F 1800
Volume (Gross / Net) 🛛	1,200 / 800	1800 / 1,100
Capacity m ³ per hour	10 - 16	20 - 30
Motor kW	18.5	30
Sound pressure level dB (A)	77.7	77.7
Mixing arms: side scrapers No	6:1	6:1
Load cells Kg	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3
Recipes No	60	60
Aggregate hopper m³	4 x 2.4	4 x 2.4
Water tank ∟	500	500
Dimension (W x H x L) m	2.3 x 2.61 x 8.7	2.4 x 2.61 x 8.9
Weight Kg	6,500	9,500
Power Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
A/KVA	50 / 35	80 / 55
Socket inlet	CEE 63A 5P 230/400V	CEE 63A 5P 230/400V
Generator KVA	65	100

FP model specifications

The FP-model is a stand-alone batching plant that we combine with any number of hoppers and options. All batching plant features **fibo** has to offer are available.



Volume (Gross / Net) L 1,200 / 800 1,800 / 1,100 Capacity m ³ per hour 10 - 16 20 - 30 Motor kW 18.5 30 Sound pressure level dB (A) 77.7 77.7 Mixing arms: side scrapers No 6:1 6:1 Load cells Kg 3 x 5,000 3 x 5,000 Weighing accuracy % +/- 0.5 +/- 0.5 Dosing accuracy % +/- 3 +/- 3 Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage A/KVA 3 x 400V N PE 50Hz Socket inlet 3 x 400V N PE 50Hz Socket inlet 3 x 400V N PE 50Hz Socket inlet		FP 1200	FP 1800
Motor kW 18.5 30 Sound pressure level dB (A) 77.7 77.7 Mixing arms: side scrapers No 6:1 6:1 Load cells Kg 3 x 5,000 3 x 5,000 Weighing accuracy % +/- 0.5 +/- 0.5 Dosing accuracy % +/- 3 +/- 3 Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage A/KVA 3 x 400V N PE 50Hz Socket inlet 3 x 400V N PE 50Hz CEE 63A 5P 230/400V 3 x 400V N PE 50Hz CEE 63A 5P 230/400V	Volume (Gross / Net) 🛛	1,200 / 800	1,800 / 1,100
Sound pressure level dB (A) 77.7 Mixing arms: side scrapers No 6:1 6:1 Load cells Kg 3 x 5,000 3 x 5,000 Weighing accuracy % +/- 0.5 +/- 0.5 Dosing accuracy % +/- 3 +/- 3 Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage A/KVA 3 x 400V N PE 50Hz 50 / 35 3 x 400V N PE 50Hz 80 / 55 3 x 400V N PE 50Hz 80 / 55	Capacity m ³ per hour	10 - 16	20 - 30
Mixing arms: side scrapers No 6:1 6:1 Load cells Kg 3 x 5,000 3 x 5,000 Weighing accuracy % +/- 0.5 +/- 0.5 Dosing accuracy % +/- 3 +/- 3 Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Motor kW	18.5	30
Load cells Kg 3 x 5,000 Weighing accuracy % +/- 0.5 Dosing accuracy % +/- 3 Pecipes No 60 Water tank L 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 Power Voltage 3 x 400V N PE 50Hz A/KVA 50 / 35 Socket inlet CEE 63A 5P 230/400V	Sound pressure level dB (A)	77.7	77.7
Weighing accuracy % +/- 0.5 +/- 0.5 Dosing accuracy % +/- 3 +/- 3 Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage A/KVA 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Mixing arms: side scrapers No	6:1	6:1
Dosing accuracy % +/- 3 +/- 3 Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Load cells Kg	3 x 5,000	3 x 5,000
Recipes No 60 60 Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Weighing accuracy %	+/- 0.5	+/- 0.5
Water tank L 500 500 Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Dosing accuracy %	+/- 3	+/- 3
Dimension (W x H x L) m 2.1 x 2.3 x 3.7 2.3 x 2.5 x 4.2 Weight Kg 3,000 4,500 Power Voltage 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Recipes No	60	60
Weight Kg 3,000 4,500 Power Voltage 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Water tank L	500	500
Power Voltage 3 x 400V N PE 50Hz 3 x 400V N PE 50Hz A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Dimension (W x H x L) m	2.1 x 2.3 x 3.7	2.3 x 2.5 x 4.2
A/KVA 50 / 35 80 / 55 Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Weight Kg	3,000	4,500
Socket inlet CEE 63A 5P 230/400V CEE 63A 5P 230/400V	Power Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
	A/KVA	50 / 35	80 / 55
Generator KVA 65 100	Socket inlet	CEE 63A 5P 230/400V	CEE 63A 5P 230/400V
	Generator KVA	65	100

Inliner specifications


The inliner solution is ideal for businesses with available space and a diverse range of customer requirements. Reduce labour costs whilst expanding into aggregate sales.



Volume per box m ³	10	10	10	15	15	25	25
Boxes pcs	4	6	8	3	6	3	6
Maximum capacity m ³ /batch	1	1	1	1	1	1	1
Width m	2.44	2.44	2.44	2.32	2.32	2.32	2.32
Height (transportation) m	2.95	2.95	2.95	2.95	2.95	2.95	2.95
Length weighing belt m	11.5	22.5	23.5	11.5	22.5	11.5	22.5
Weighing cells pcs	4	8	8	4	8	4	8

Belt conveyors specifications

Choosing the right conveyor for your customers is essential. How high and low do you need to go?

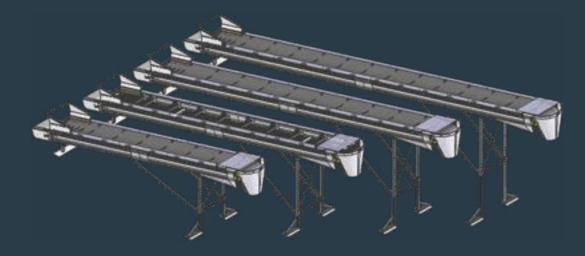

	0.8m	1.0m
Length m	8 - 12	8 - 14
Outlet height m	Adjustable	Adjustable
Belt speed m/sec	1.6	1.6
Belt rollers type	PEH and steel	PEH and steel
Belt scrapers pcs	2	2
Drum motor kW	4	7.5
Inlet funnel pcs	1	1
Outlet funnel pcs	1	1


Hydraulic belt conveyor specifications

Enhance your conveyor with automation.



Length m
Outlet height minimum m
Outlet height maximum m
Belt speed m/sec
Belt rollers type
Scrapers pcs
Drum motor kW
Inlet funnel pcs
Outlet funnel pcs

1.0m	
10, 12 or 14	
1.4	
4.6	
1.6	
PEH and steel	
2	
4	
1	
1	

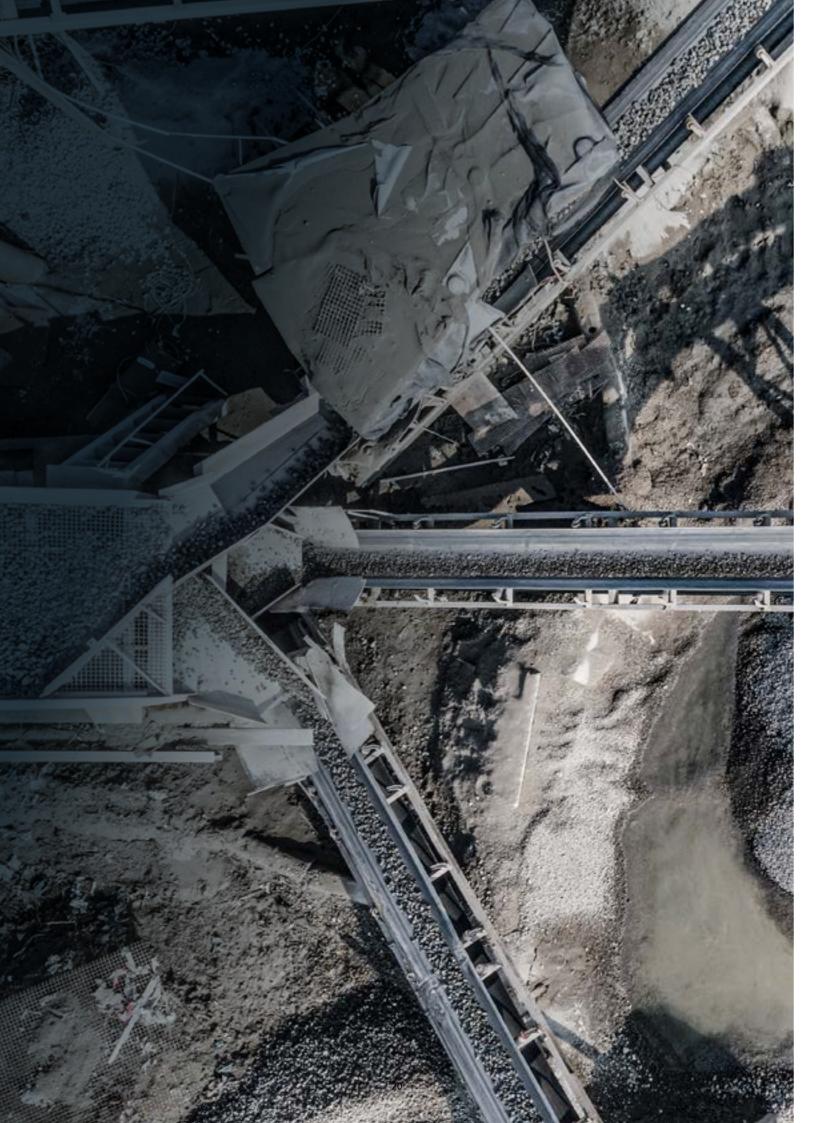

Most common optional extras

Here are some of the most common **fibo** collect options ordered by our existing customers

1	Customized color
	You can choose the color for your plant, so it fits your other equipment.
2	Vibrator Vibrator MVE 100/3 for vibrating sand out of the hopper, with cabling and switch. Required placement on the left or right hopper side. Makes sure all aggregates in the hopper used.
3	Wattmeter Measuring motor load resistance may allow concrete viscosity measuring. Consequential processes can be automated in the control system.
4	Extended hopper sides Increase silo capacity by 60 %. The enlarged silo sides f add 1.5 m ³ to each hopper, so the total volume for each hopper is 3.9 m ³ .
5	Additive pump and flow meter High-quality time-based dosing pump with electro magnetic flow meter.
6	Insulation/Winter package Liquid supply lines are equipped with trace heating tape and additional insulation. The cabinet for additive and high-pressure cleaner pumps is fitted with a radiant heater.
7	Water heater Electric heating in the water tank for frost protection. Complete with thermostat and switch.

CONTRACT OF A	Pust filter for the mixer to reduce ement dust in the environment
8	Temperature sensor for the water tank
	Sensor for measuring the water temperature in the tank.
9	Dust filter for the mixer
	Filter to reduce cement dust in the environment during the dosing process.
10	Water protection cover
	Removable cover made of heavy-duty PVC to protect aggregates from the elements. Easy and quick deployment with a manual winch.
11	Fibre dispenser Automated synthetic fibre dispenser.

Continuous improvement through digital innovation

At fibo intercon, innovation never stands still. With sustainability as an important part of our DNA, we tirelessly develop technologies and solutions, aimed at reducing the carbon footprint in construction. At the same time, we put customer value and knowledge sharing at the centre of our developments.

Latest innovations

Cloud based integration $\subseteq \mathbb{A}$

fibo cloud-based resource and data management system.

- Online accessible plants
- · Monitoring of production and productivity
- Recipe and pricing management
- · Aggregate and cement management
- Possibility for using the terminal screen as advertising space
- Remote service and support

fibo Link

- · Online where-ever, when-ever
- Remote supervision
- Monitoring of production and deadlines away-from-sight
- · Order aggregate / materials based on status alarms away-from-sight
- · Production and sales data for your fibo collect



fibo Academy is a learning platform about your system from set up to programming

- Sharing concrete knowledge and beyond
- Maintenance and troubleshooting
- Programming of recipes, pricing, etc



CO2 calculations

Is the carbon footprint a deciding factor for your fibo collect

- The innovative but straightforward self-service approach ensures quality, accuracy and sustainability
- Talk to fibo for location based CO, calculations



• Dosing of aggregates for single sale



fibo Collect - Customized dosing

- End-user differentiated dosing of accelerators for faster curing
- End-user differentiated dosing of retarders for delayed curing
- End-user diffenrentiated dosing of fibers for increased strength



The innovative but straightforward self-service approach ensures quality, accuracy and sustainability.

BECKHOFF

Green thinking

fibo intercon is dedicated to carbon reduction and sustainability in concrete production. We have tools to help you reduce your carbon footprint and improve your sustainability.

The tools include:

- Concrete waste recycling
- Carbon reduction calculator
- CO₂ and pollution reduction
- Cement dust filter
- Self-cleaning pan mixer
- More circular economy: Less waste, less water use, fewer production failures, less workforce and reduced overflow production
- More bottom-line green earnings

We are proud of our technology and innovation. It is today's state of the art in concrete production. What started as an internal sentence, "easy-toclean-green-machine", has become our overall philosophy in product development: Make it automatic, have a cleaner production, reduce failures and setbacks and always try to make the solution green and circular.

Henrik B. Jeppesen, CEO fibo intercon







Customer stories

Listen to what some of our customers have to say about **fibo** collect.

HORNCLIFFE





Builder's merchant, North Wales

The UK's first ever **fibo** collect installation at an independent local builders merchants in North Wales.

The process is so simple. The customer comes to our trade " counter as normal, they tell us the mix and quantity they want, we produce their bar code. Within about 5 minutes can have the exact product they require.

We are already looking at expanding this it into our delivery network and rolling it out to the rest of our sites across North Wales.

Tim Harper Managing Director

WATCH ONLINE







ATDV

ADTV

Construction, France


A fibo collect plant for the local community in the Western part of France.

" to Sunday.

> Thanks to its automatic water washing system, we have excellent quality concrete and mortar without gravel residues. The automatic mixer washing system frees us from the need to clean at the end of the day or even during hot weather.

Emmanuel Rochteau SAS DBPE





The **fibo** collect concrete self-service plant is the solution for customers who want to buy dry or wet concrete from Monday

The **fibo** collect self-service plant is an environmentally friendly solution for professionals and private individuals.

Click below to see our latest **fibo** collect videos online.



fibo intercon Concrete solutions for the future

fibo intercon is a leading partner and supplier to the global concrete industry. We manufacture and deliver both mobile and semi-mobile concrete batching plants.

Our vast experience and innovational approach drive continuous improvements and change. We aim to support your business by delivering world-class concrete solutions that not only raises your productivity but also reduces your carbon footprint.


Whatever the challenge – and wherever in the world – we bring on knowledge, technology and new perspectives to the table and meet your needs from one end to the other.

1978

business.

A/S **fibo** is divided into independent divisions.

Production and installation

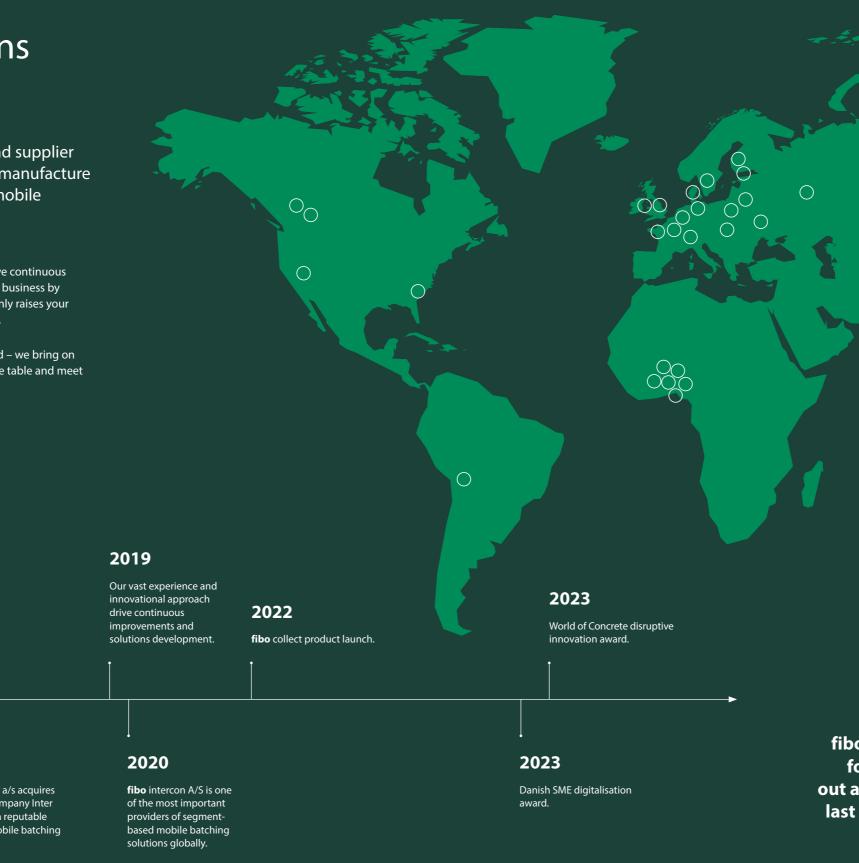

of global concrete plants becomes the main line of

1935

The company starts as a repair workshop associated with Fiskbaek Briketfabrik.

2003

fibo maskiner a/s acquires the Danish company Inter Con which is a reputable supplier of mobile batching solutions.

Knowledge and technology that grows your business

- Danish design and quality
- Built-to-last technology ensures
 high return on investment
- Reduction of your carbon footprint (average of 10%)
- Recycling of waste with concrete
 waste management system
- Easy installation and low maintenance costs
- Global service and support


fibo intercon has been in existence for more than 70 years. It started out as a repair workshop, but for the last 40 years the company has been developing and manufacturing different types of machinery.

fibo Business Support helping customers get a return on investment

fibo has a global network of partners to ensure that customers can get hands on support in developing their business case and calculating the return on investment.

Some of the things we offer

- ✓ Customised 3D drawings
- ✓ ROI Calculation including:
 - Cost breakdown
 - Cashflow
 - Management report
- \checkmark Support with go to market strategy and planning

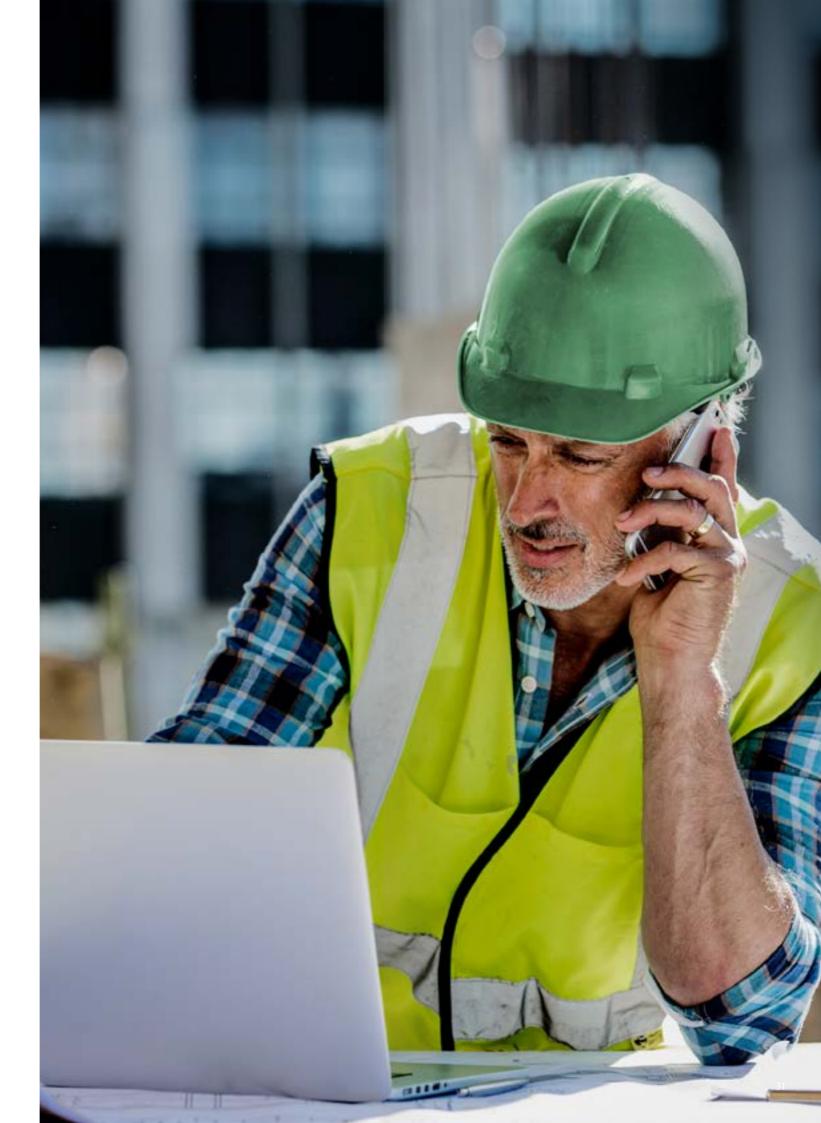

Service and support Documentation, warranty and control

We take pride in supporting you from the initial plant set-up to helping you with disposal at the end of the plant's life. A well-maintained **fibo** collect batching plant will give you a service life between 15-20 years.

Your service benefits

- Pre-delivery technical inspection and hands training with our team in Denmark
- Experienced support at your site
- fibo Technical Academy, including technical service, videos and downloads
- Cloud-based connection to your plant for fast troubleshooting
- Preventive maintenance online support



Getting started

fibo has a global network of approved partners that allow us to service customers all over the world. Get in touch with your local **fibo** contact using the details below.



fibo intercon Herningvej 4 Videbæk Denmark

+45 97 17 16 66 info@fibointercon.com www.fibointercon.com

Other useful contacts



Managing Director Henrik B. Jeppesen Tel: +45 6080 3377 hbj@fibointercon.com



Sales Manager Martin R. Fischer Tel: +45 3080 9035 mrf@fibointercon.com

